CUT LIST:
CONCRETE: 1.22 CU. YD.
TOTAL APPROX. WEIGHT: 4740#
4- 3/4" COIL LIFTING INSERTS
9-#4X6"
4-#4X10"
4-#4X12"
9-#4X3'-8"
6-#4X5'-8"
10-#4X6'-0"

NOTES
1) REFER TO PNM STANDARDS FOR ALL ELECTRICAL REQUIREMENTS.
2) EXISTING GRADE AND BACKFILL UNDER CONCRETE PAD SHALL BE COMPACTED TO 95% IN ACCORDANCE WITH ASTM D1557
3) CONCRETE COMPRESSIVE STRENGTH: 4000f'c
4) ALL #4 REBAR, GRADE 60 (ASTM A615)
5) 2" CLEARANCE ON REBAR UNLESS NOTED OTHERWISE.
6) 4-7% ENTRAINED AIR

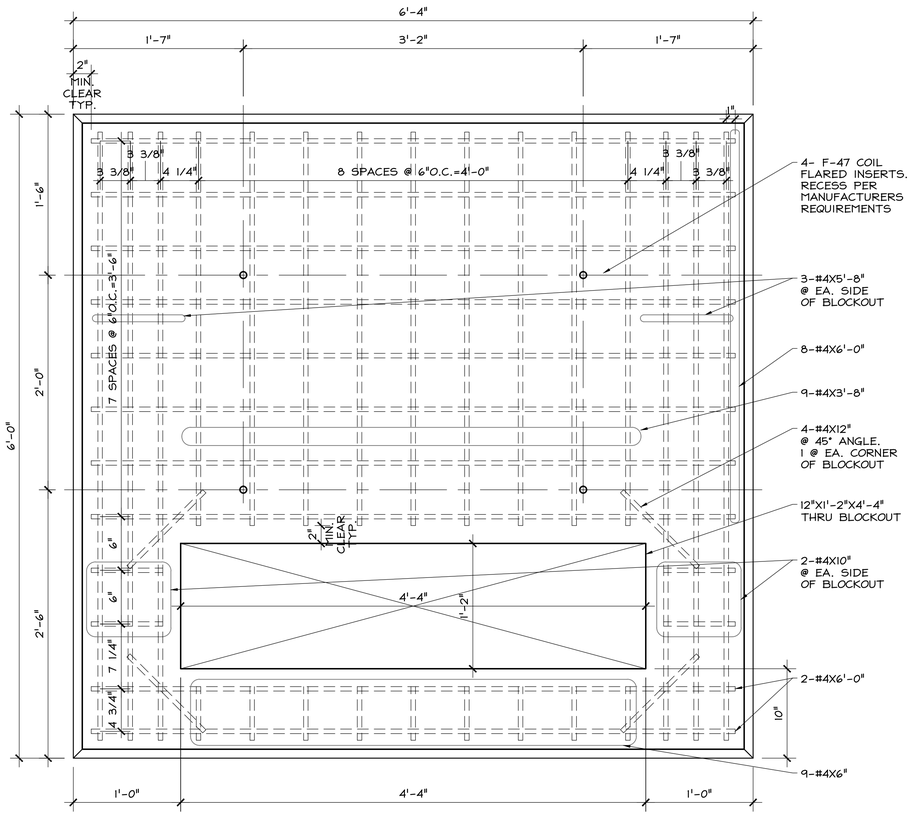

A PLAN
1 1/2"=1'-0"

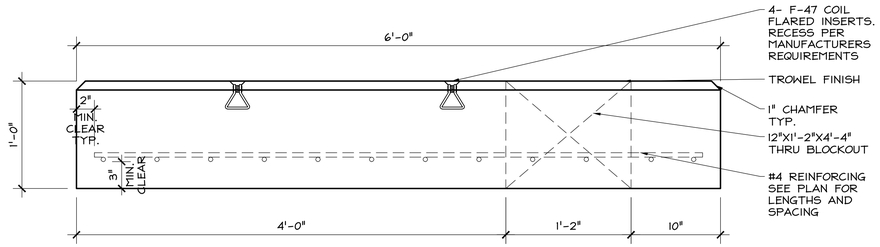

B ELEVATION: 6'-0" SIDE
1 1/2"=1'-0"

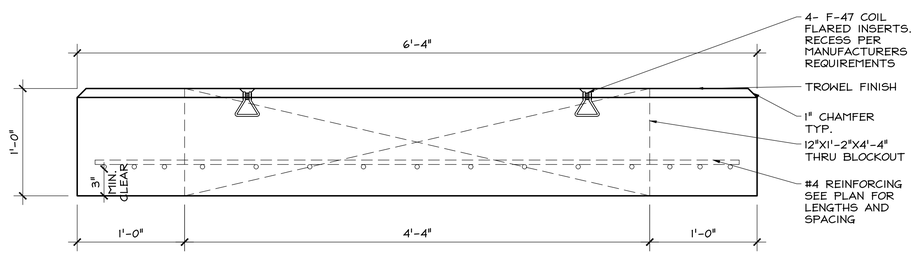

C ELEVATION: 6'-4" SIDE
1 1/2"=1'-0"

ARCHITECTURAL & PRECAST CONCRETE
MATERIALS, INC
A DIVISION OF BUILDOLOGY
P.O. BOX 1507
BERNALILLO, NM 87004
PHONE: (505) 867-9035
FAX: (505) 867-4419

NPCA CERTIFIED PLANT

PNM 75-500 kVA
THREE-PHASE RADIAL FED
PRECAST TRANSFORMER PAD

PRODUCT CODE:
TRF-7660

REVISIONS:

DRAWN BY:
JDE

REVIEWED BY:
XXX

DATE:
FEBRUARY 28, 2013

DESCRIPTION:
PLAN VIEW & CROSS SECTIONS

SCALE:
AS NOTED

1.0