

TOP

.51 CY CONCRETE
 WEIGHT: 2050#
 APPROX. CAVITY VOLUME
 12.5 CU. FT.

CONCRETE SPECIFICATIONS

4000 f'c 28-DAY COMPRESSIVE STRENGTH
 4-7% ENTRAINED AIR
 MILD STEEL REINFORCING AS REQUIRED
 POLYPROPYLENE FIBER SECONDARY
 REINFORCING

FORMS

SMOOTH SURFACE FIBERGLASS

COLORS

GREY OR INTEGRAL COLOR (COHILL COLOR
 PIGMENTS AVAILABLE)


STANDARD FINISH

LIGHT SANDBLAST
 CLEAR SEALER

SANTA FE PLANTER

PL-2260

ARCHITECTURAL PRECAST CONCRETE
MATERIALS, INC.

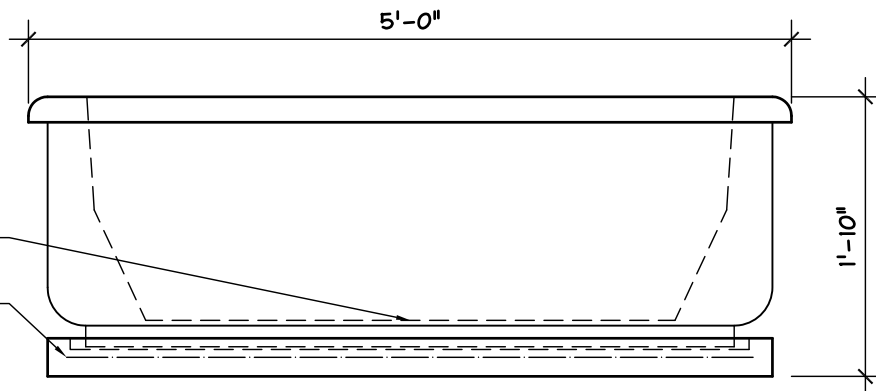

4- 1/2" DIA.
 DRAINHOLES

4X4 WWF

ELEVATION