


PLAN

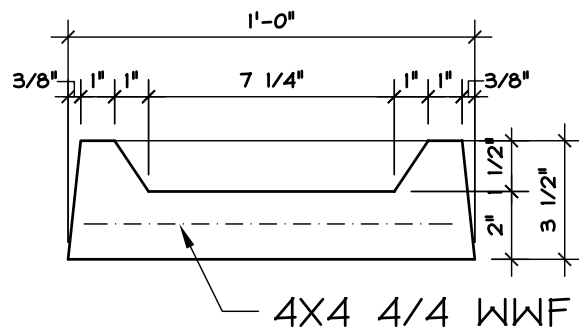

ELEVATION

WEIGHT: 40 #

CONCRETE SPECIFICATIONS

4000 f'c 28-DAY COMPRESSIVE STRENGTH

4-7% ENTRAINED AIR

MILD STEEL REINFORCING AS REQUIRED

POLYPROPYLENE FIBER
SECONDARY REINFORCING

FORMS:

SMOOTH SURFACE FIBERGLASS

COLORS:

GREY

FINISHES

SMOOTH AS-CAST

12" x 16"
SPLASH BLOCK