


#3 STIRRUPS
@ 8" O.C.

4-#4 REBAR

1'-6" ϕ

PLAN

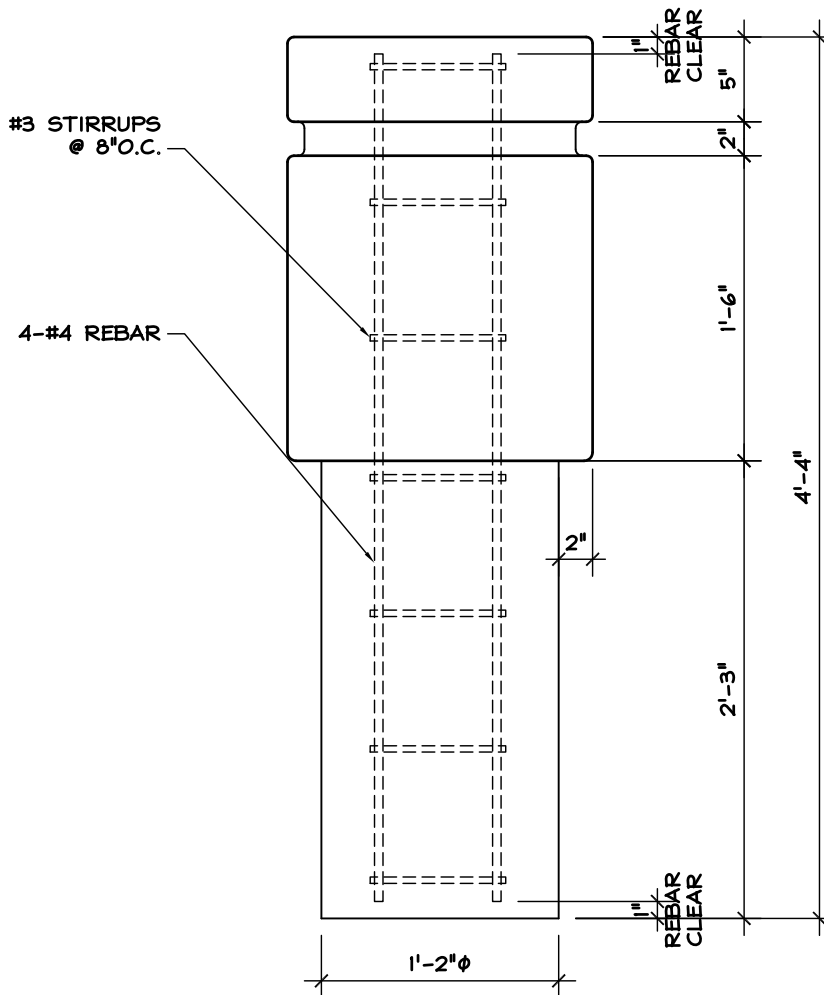

#3 STIRRUPS
@ 8" O.C.

4-#4 REBAR

1"
REBAR
CLEAR

5"

2"

1'-6"

4'-4"

2"

2'-3"

1"
REBAR
CLEAR

1'-2" ϕ

ELEVATION

WEIGHT: 905 #

CONCRETE SPECIFICATIONS

4000 f'c 28-DAY COMPRESSIVE STRENGTH

4-7% ENTRAINED AIR

MILD STEEL REINFORCING AS REQUIRED

POLYPROPYLENE FIBER SECONDARY REINFORCING

FORMS

SMOOTH SURFACE FIBERGLASS

COLORS

GREY OR INTEGRAL COLOR (COHILLS COLOR PIGMENTS AVAILABLE)

FINISHES

A RANGE OF SANDBLAST TEXTURES

SMOOTH AS-CAST

ACID WASH

CLEAR SEALER

1852
BOLLARD

ARCHITECTURAL PRECAST CONCRETE
MATERIALS, INC.